


Datu pārraides risinājumi

Omniswitch value stack - evolution



OS6560 PERF LICENSE

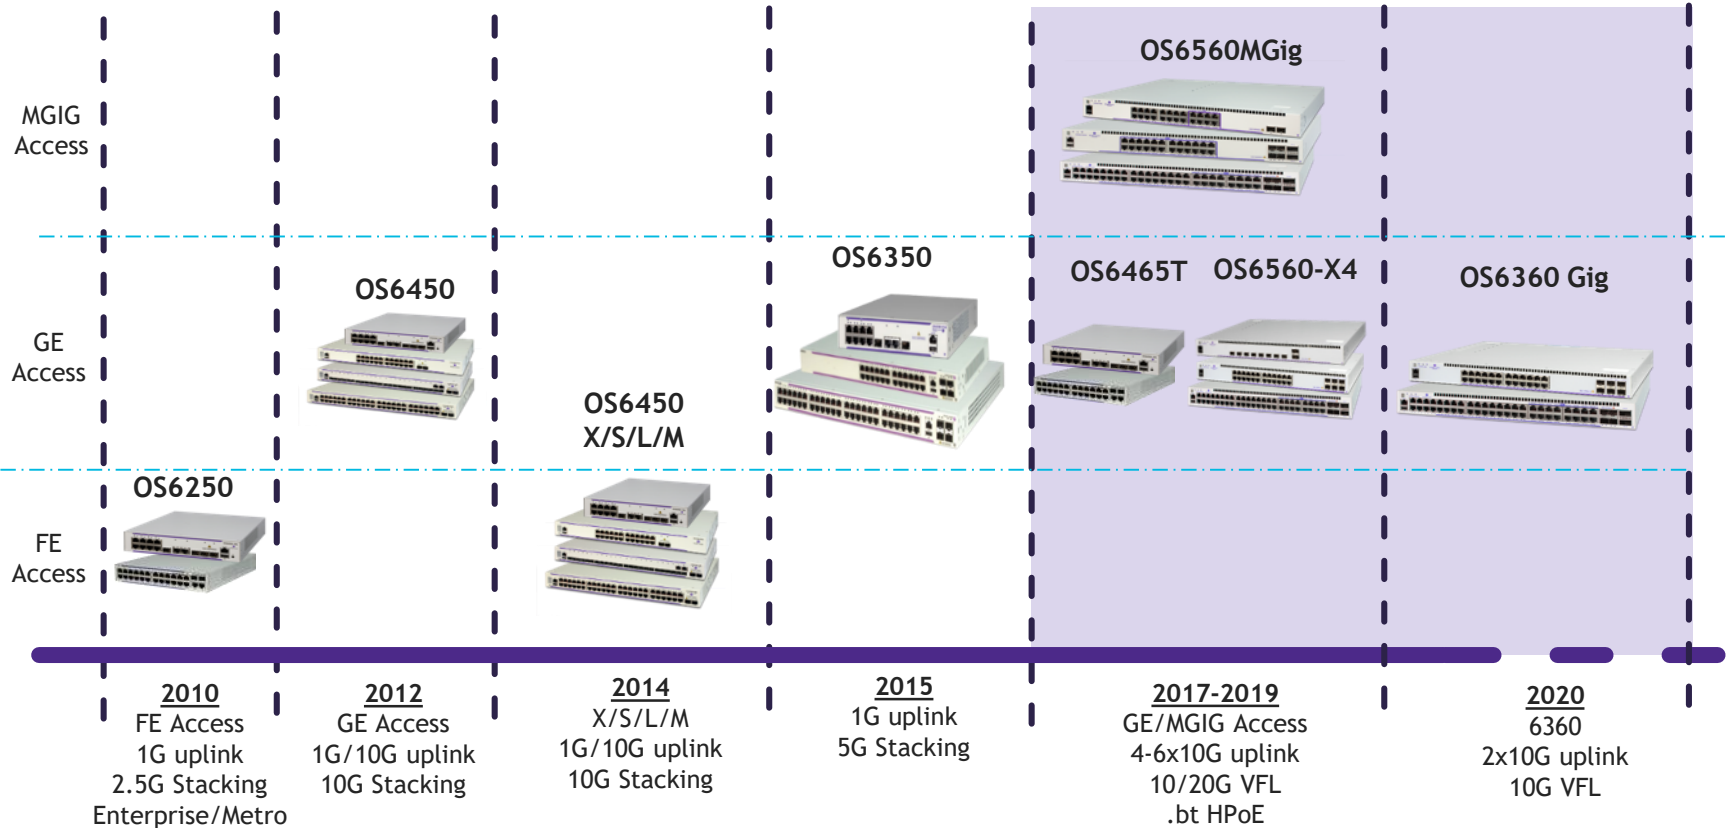

OS6560-24X4
OS6560-P24X4




OS6560-48X4
OS6560-P48X4

model	10/100/1000 RJ45 Ports	Gigabit SFP+ (license upgrade to 10G)	10GE SFP+	Power Supply	MACsec
OS6560-24X4	24	2	4	Internal	user ports*
OS6560-P24X4	24 PoE+	2	4	600W Modular	user ports*
OS6560-48X4	48	2	4	Internal	user ports + uplinks*
OS6560-P48X4	48 PoE+	2	4	900W Modular	user ports + uplinks*
SKU	Gigabit/2.5G	10GE SFP+	20G QSFP+	Power Supply	
OS6560-X10	0	8	2	Internal	user ports*


AOS VALUE STACK PRODUCT DIFFERENTIATION

Feature				
Operating System	OEM	VxWorks	VxWorks	Linux
1G uplinks	✓	✓	✓	✓
2.5G uplinks	✗	✗	✗	✓
10G uplinks	✗	✗	✓	✓
Stacking	✗	5GE	10GE	10G/20G
Remote stacking	✗	✗	✓	✓
PoE/PoE+/HPoE	✓	✓✓	✓	✓✓✓
Backup Power	✗	✗	✓	✓
802.3az (EEE)	✓	✓	✓	✓
# of Gigabit Models	6	6	18	10
Management	Web/OV	CLI/WEB/OV	CLI/WEB/OV	CLI/WEB/OV
OV Integration	Generic	✓	✓	✓
Dynamic Routing	✗	✗	✓	✓
Captive Portal	✗	✓	✓	✓
ERP/UDLD	✗	✗	✓	✓
IEEE 1588/MACsec	✗	✗	✗	✓✓
AG 2.0	✗	✗	✗	✓
ISSU	✗	✗	✗	✓
Auto VFL	✗	✗	✗	✓
Price Range	\$229-1099	\$680-3070	\$840-7160	\$840-7800

OS6350/OS6360 PRODUCT EVOLUTION

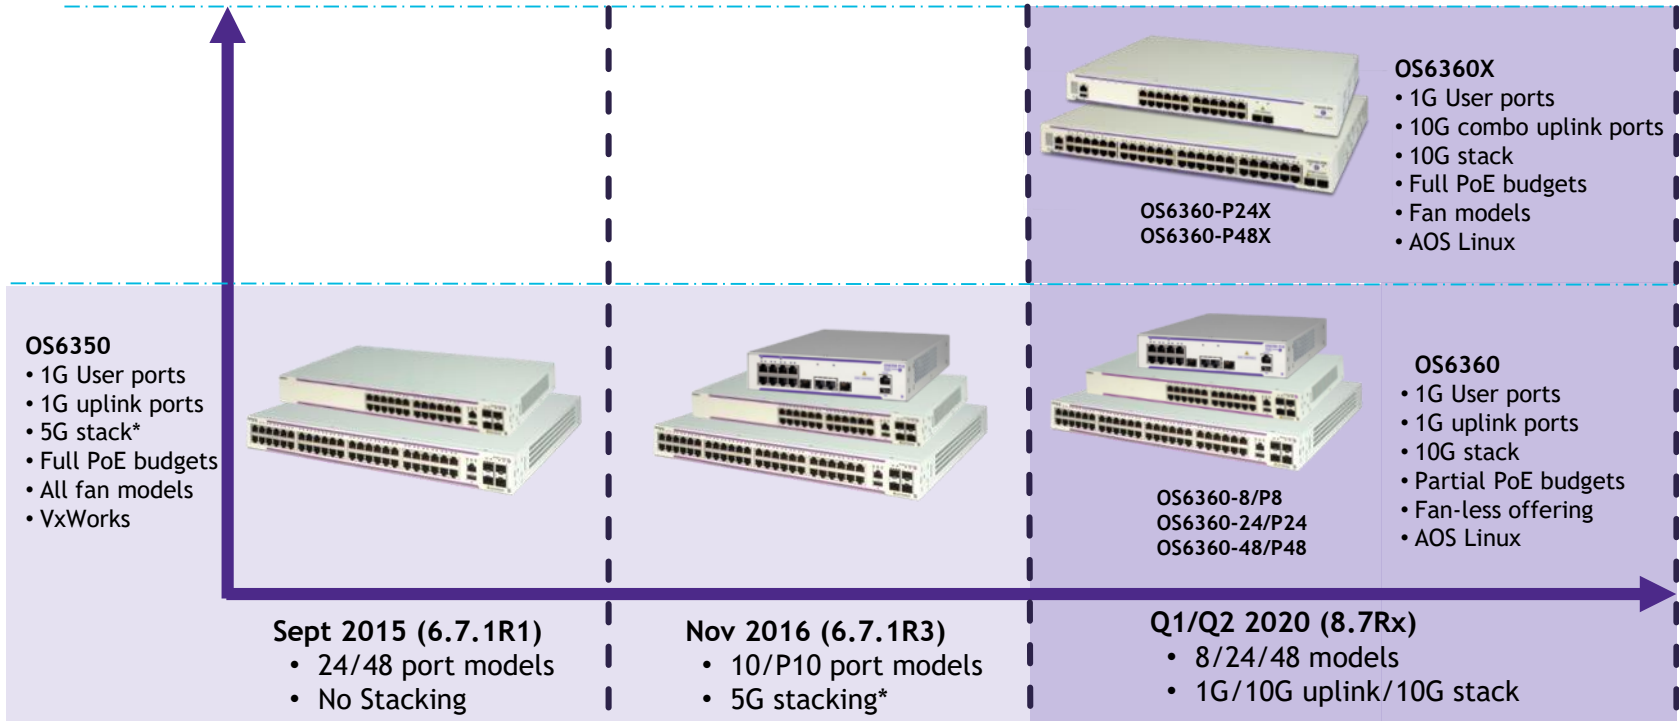


OS6465/T: RUGGED, EXTENDED TEMP & METRO FAMILY

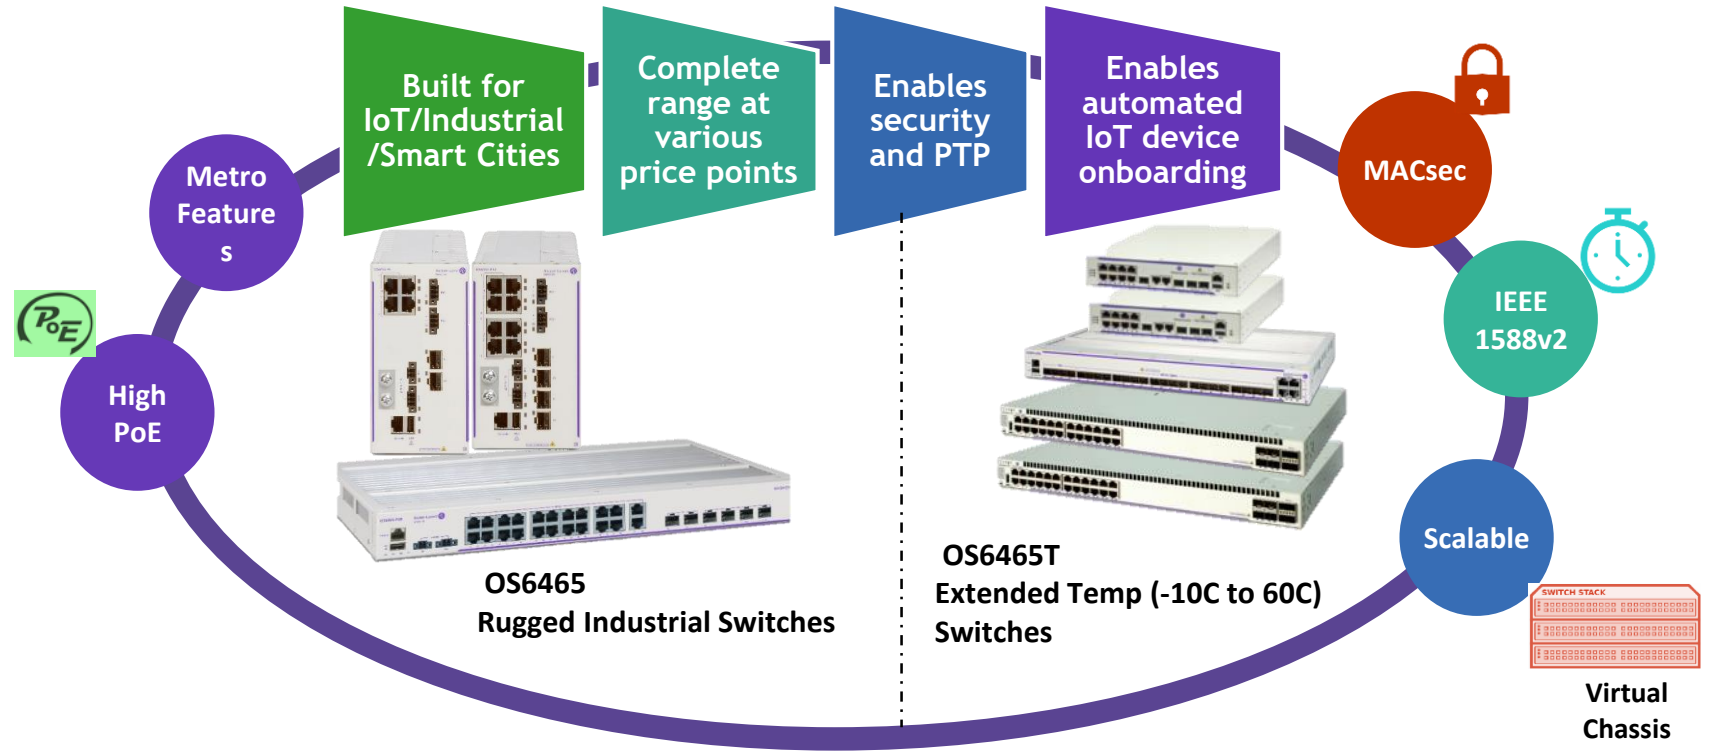

A complete range of Hardened Switches for IoT/Industrial/Smart City deployments

OS6X65: RUGGED/EXTENDED TEMP/METRO TIMELINE

7

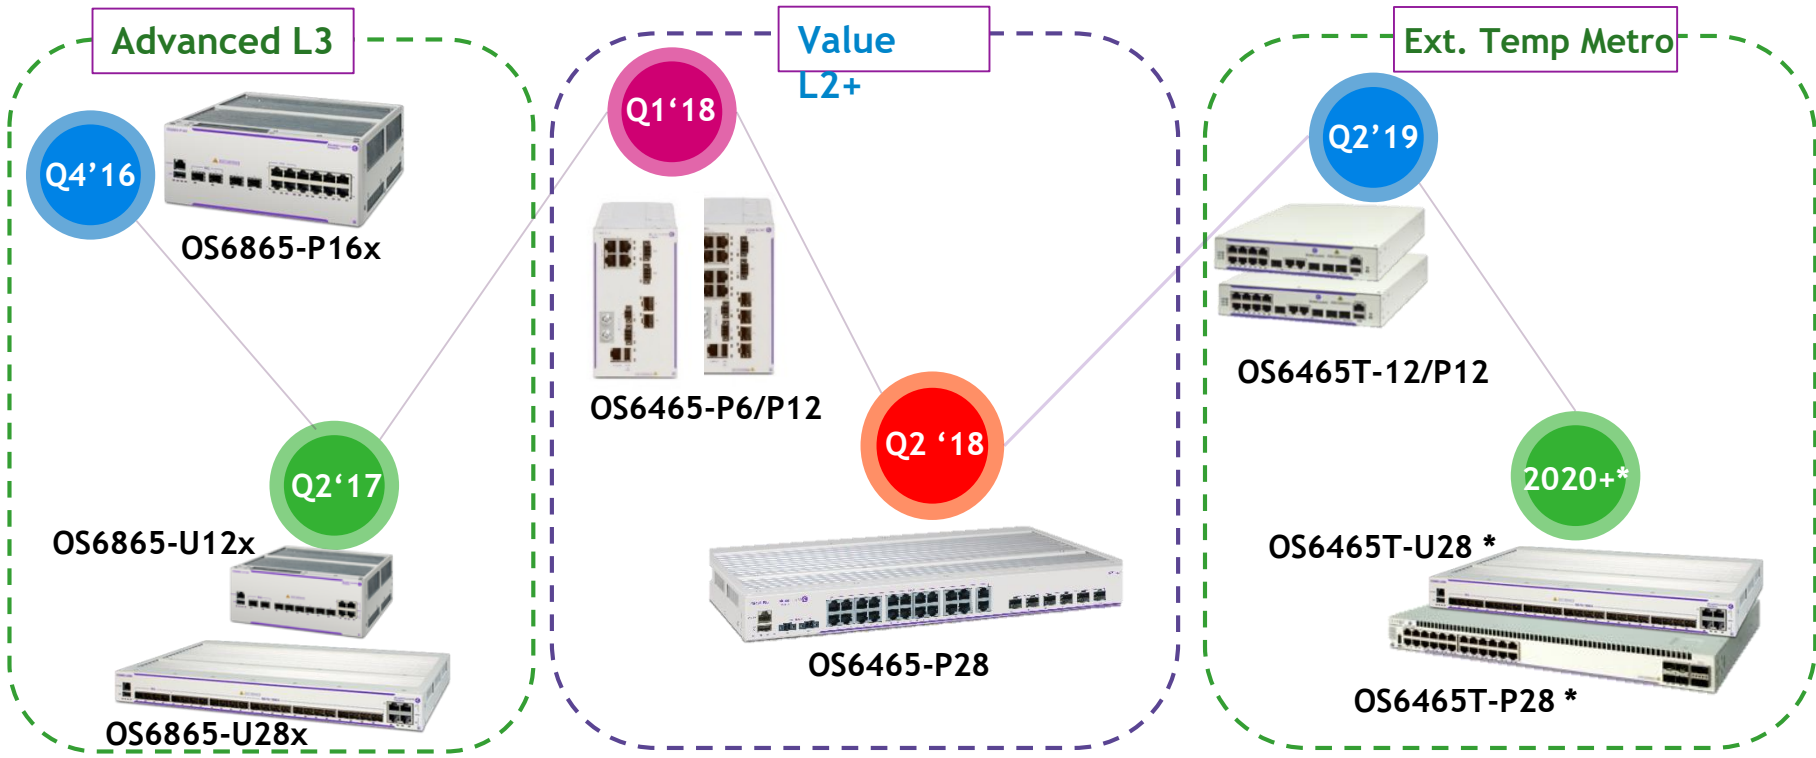

OS6465T-P12 / OS6465T-12

OS6465T-P12	OS6465-12T
8 x 10/100/1000 BaseT PoE+ Ports	8 x 10/100/1000 BaseT Ports
2 x Gigabit Combo ports	
2 x SFP Uplink / Stacking ports	
MACsec & 1588v2 Support on all ports	
Plenum Rated; Certified for Smart building deployments	
1 RU high, 1/2 Rack width 19"	
Operating Temp -10 C to 60 C	
Internal AC Power supply – 185 W	Internal 65W AC power supply



- Fan-less operation between -10 to 45° C ambient temperature
- Extended temperature rack mount models
- Replacement 6250 / 6450 Metro - 8/10 port models
- Support all Metro features
- Smart cities/building applications

OS6900: 10G/25G/100G TOR SWITCHES

Secure Virtual networks with inline routing

Built for High Bandwidth Core

Enables Automated IoT Device Onboarding

Investment Protection

High Speeds
100G

UP TO 100G

High Capacity
6.4T

SPB
VxLAN
L3VPN

MACsec

Virtual Chassis

New in 2019



OS6900-C32:
32x 100G ports



OS6900-X48C6:

48x 10G fiber ports with
6x 100G uplinks




OS6900-T48C6:

48x 10G-BaseT ports with
6x 100G uplinks



OS6900-V72:
48x 25G ports with
6x 100G uplinks

OS6860N: ADVANCED & NEXT-GEN MODELS

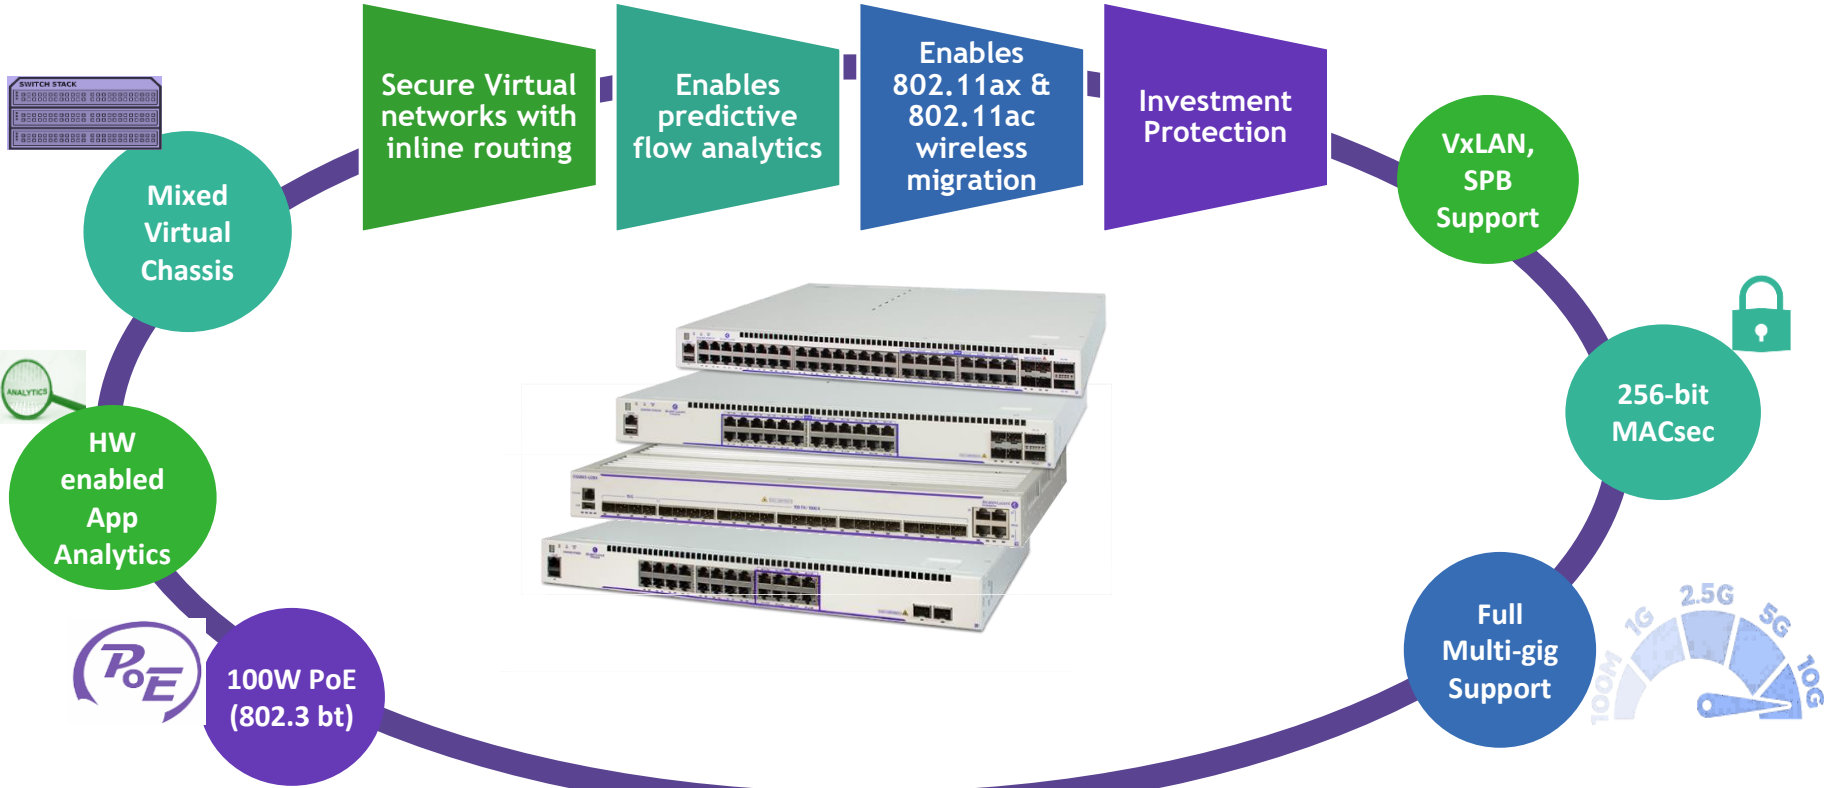

Advanced access platform for tomorrow's network

OS9900: competitive chassis



Flexible configuration
competitive pricing

Investment protection
with 100G core

Secure IoT
chassis with MACsec

Enables automated
device onboarding

Flexible

Competitive

MACsec

SPB
L3VPN

Virtual
Chassis

- ◆ New in 2019
- ◆ OS99-XNI-U24
- ◆ OS99-XNI-P24Z8
- ◆ OS99-XNI-U12Q
- ◆ OS99-XNI-UP24Q2

- ◆ OS99-GNI-U48
- ◆ OS99-XNI-P48Z16
- ◆ OS99-CNI-U8

- ◆ OS99-CMM/CFM
- ◆ OS99-GNI-48
- ◆ OS99-GNI-P48
- ◆ OS99-XNI-48
- ◆ OS99-XNI-U48



Low density multi-Gig PoE boards



Low density 10G Base-T boards



Low density 10G fiber boards

Lower Entry Point | Flexible Deployment | Customizable

END TO END SOLUTION




- ✓ Conversations starter: Wifi 5 / 6 support
- ✓ Future proof: support for MultiGig
- ✓ Return on investment: Automation
- ✓ Advanced services support: LBS
- ✓ Maximum security: MACsec support
- ✓ Increased # of video flows support



SMB Segmentation

13

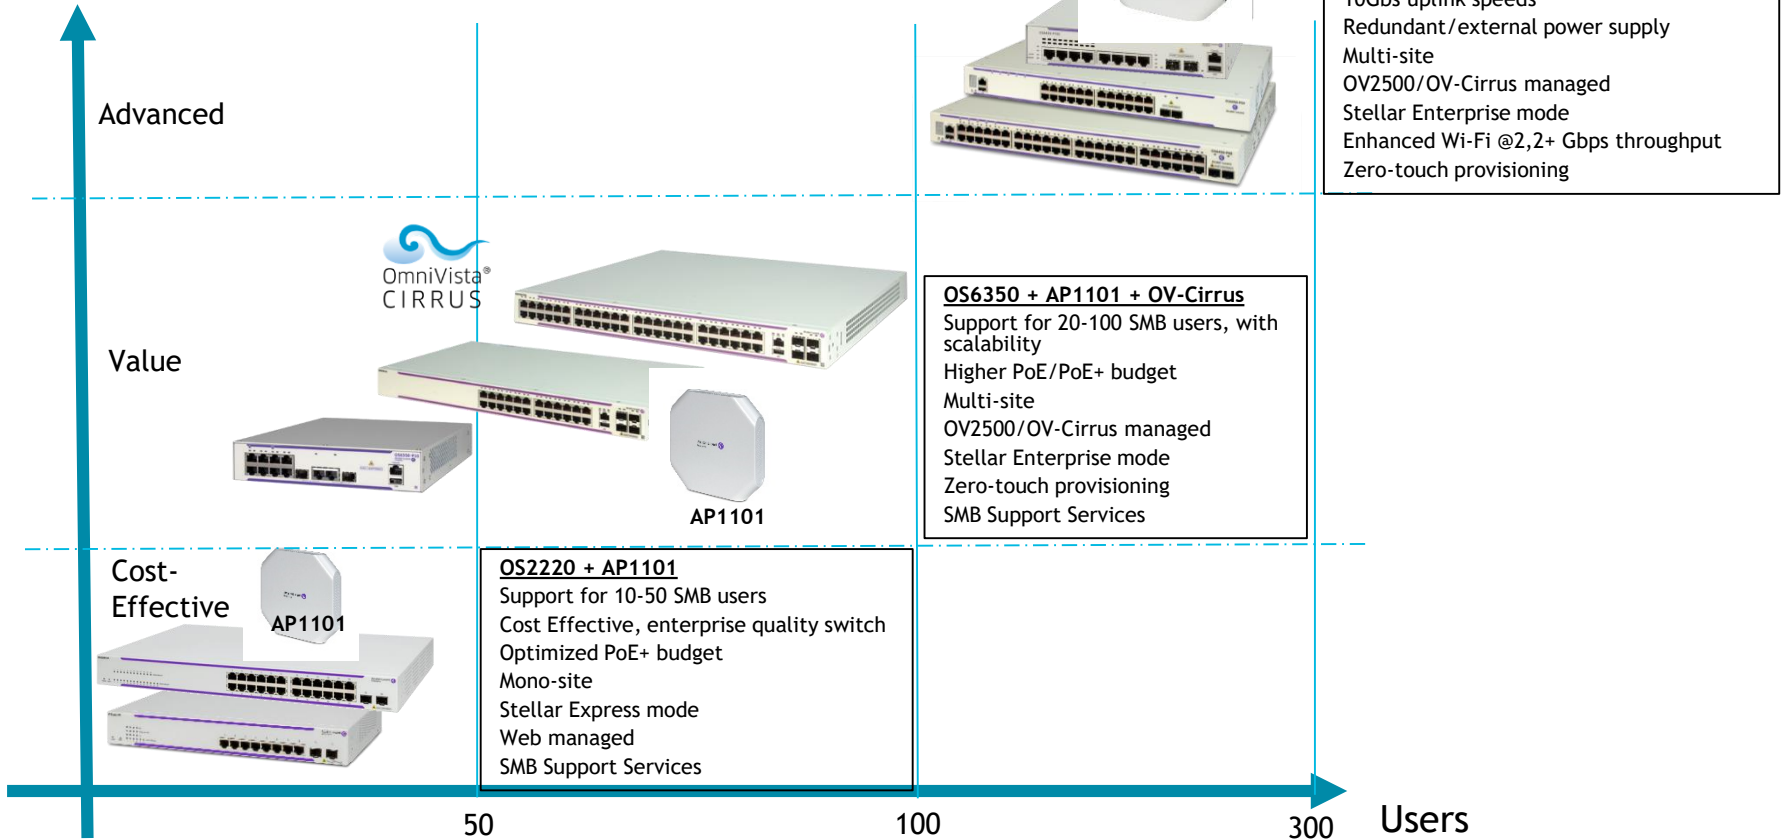

Datasheets

Management Platform

- OmniVista 2500 [datasheet](#)
- OmniVista Cirrus [datasheet](#)

LAN Switches

- OmniSwitch 2200 SMB WebSmart switch: [datasheet](#)
- OmniSwitch 6350 SMB LAN switch: [datasheet](#)
- OmniSwitch 6450 Stackable Gigabit Ethernet LAN switch: general [datasheet](#) , 10 port [datasheet](#)
- OmniSwitch 6465 Hardened L2+ LAN Switch [datasheet](#)
- OmniSwitch 6560 - Stackable Multigig LAN switch: [datasheet](#)
- OmniSwitch 6860 - Stackable LAN switch with multigig and DPI option [datasheet](#)
- OmniSwitch 6865 - Hardened L3 Switch [datasheet](#)
- OmniSwitch 6900 - Stackable 40G core switch [datasheet](#)
- OmniSwitch 9900 - Chassis core switch [datasheet](#)

Stellar WLAN

- OmniAccess AP1101 SMB 802.11ac AP: [datasheet](#)
- OmniAccess AP1201 entry-level 802.11ac Wave 2 AP: [datasheet](#)
- OmniAccess Stellar AP1220 Series- High performance wave 2 AP: [datasheet](#)
- OmniAccess Stellar AP1230 Series - Ultra high performance wave 2 AP: [datasheet](#)
- OmniAccess Stellar AP1251 - Rugged wave 2 AP: [datasheet](#)

CONTACTUS



katrina.levita@adventus.lv

andris.laumanis@al-enterprise.com

WEBSITE

www.adventus.lv

www.al-enterprise.com

Follow us on:

